


Ultraflo Liquid Screed

Flow (DIN 1060 Test)	230—250mm
Plastic Density	2,060-2,130kg/m ³
Dry Density	1,950—2,050kg/m ³
Flexural Strength	>4 N/mm ²
Fire Rating	Non-combustible
Thermal Expansion Co-efficient	0.01 mm/mk
Thermal Conductivity	1.66—1.88 W/mk
Drying Skrinkage	Less than 0.02%
Drying Time (40mm depth, ambient 20°C and 65% relative humidity)	1 day/mm

Sand:Cement Screed

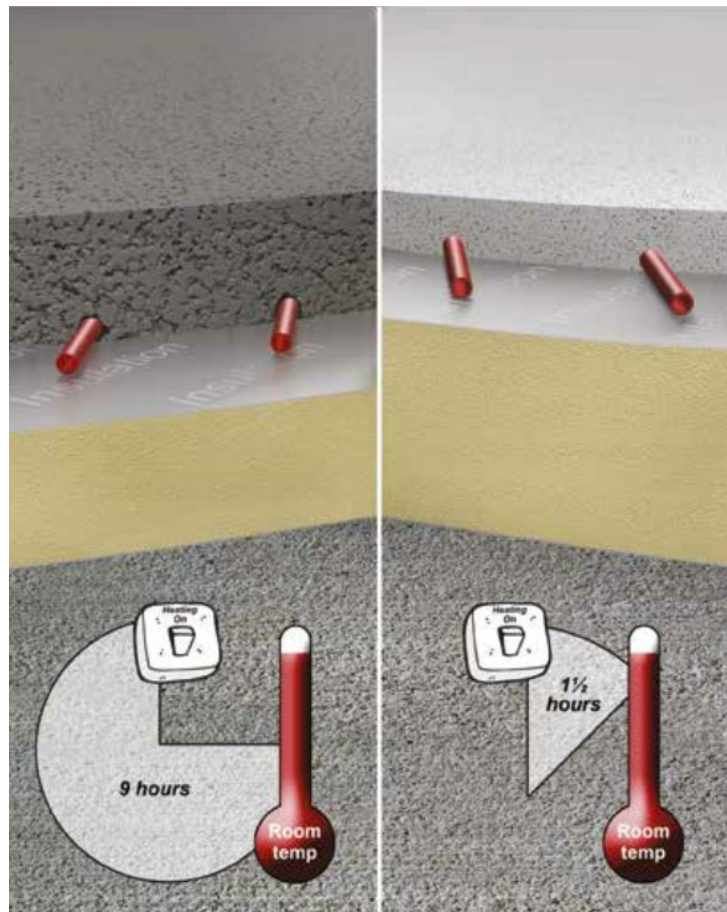

Ultraflo Liquid Screed